

03-02-00

A

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.  
13434

Total Pages in this Submission

**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**VIDEO IMAGE CODING APPARATUS**

and invented by:

Satoshi Nogaki

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 23 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications *(if applicable)*
  - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
  - d. ☐ Reference to Microfiche Appendix *(if applicable)*
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings *(if drawings filed)*
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
13434

Total Pages in this Submission

## Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)

- a. ☒ Formal                      Number of Sheets 6
- b. ☐ Informal                      Number of Sheets \_\_\_\_\_

4. ☒ Oath or Declaration

- a. ☒ Newly executed (original or copy)      ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (usable if Box 4b is checked)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Computer Program in Microfiche (Appendix)

7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)

- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

## Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement/PTO-1449      ☐ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Acknowledgment postcard

14. ☒ Certificate of Mailing

☐ First Class      ☒ Express Mail (Specify Label No.): EL089369908US

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
13434

Total Pages in this Submission

**Accompanying Application Parts (Continued)**

15. ☐ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*

16. ☒ Additional Enclosures *(please identify below):*

Claim of Priority without certified copy of Japanese Application

**Fee Calculation and Transmittal**

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	9	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	1	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose) Assignment recordal fee					\$40.00
TOTAL FILING FEE					\$730.00

- ☒ A check in the amount of \$730.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-1013/SSMP as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Signature

Paul J. Esatto, Jr.  
Registration No. 30,749  
SCULLY, SCOTT, MURPHY & PRESSER  
400 GardenCity Plaza  
Garden City, NY 11530  
(516) 742-4343

Dated: March 1, 2000

CC:

**CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)**Applicant(s): **Satoshi Nogaki**

Docket No.

**13434**

Serial No.

**unassigned**

Filing Date

**herewith**

Examiner

Group Art Unit

**unassigned**Invention: **VIDEO IMAGE CODING APPARATUS**

jc511 U.S. PTO

09/516139



03/01/00

I hereby certify that this **New Patent Application***(Identify type of correspondence)*

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under

37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231

on **March 1, 2000***(Date)***Janet Giordano***(Typed or Printed Name of Person Mailing Correspondence)**(Signature of Person Mailing Correspondence)***EL089369908US***("Express Mail" Mailing Label Number)***Note: Each paper must have its own certificate of mailing.**

# VIDEO IMAGE CODING APPARATUS

## BACKGROUND OF THE INVENTION

### Field of the Invention

5       The present invention relates to a video image coding apparatus for compression encoding a video image, and more particularly to a video image coding apparatus wherein an input image is divided into image divisions and the image divisions are parallely coded.

10

### Description of the Related Art

A video image coding apparatus has made rapid progress particularly in recent years. For example, development of image communication and digital broadcasting which adopt the ISO/IEC13818-2 (MPEG-2 VIDEO) is proceeding at present. For coding of such a standard television signal as is prescribed in the ITU-R.601, a particularly high processing speed is not required, and therefore, an apparatus for the coding can be implemented using a single encoder even with a circuit technique and an LSI technique at present.

20       However, it is difficult to implement an apparatus for encoding such a video image of a high resolution as a video image of a high definition television (HDTV) broadcast using a single encoder with the circuit technique and the LSI technique at present. In order to solve this problem, it is a common technique to divide an input image signal and

parallelly process resulting image division signals with a plurality of encoders. Where the technique just described is adopted, if the encoders are controlled so as to operate equivalently to a single encoder by taking such a method that  
5 information is always interchanged between the encoders, then this makes the apparatus and circuit control much complicated and is not practical.

Therefore, it is a method normally taken to control the encoders to perform a coding operation in synchronism with a  
10 frame or field period or to control the encoders to operate basically independently of each other. For example, a system wherein coding control is performed independently for each of divided portions of a screen is disclosed in Japanese Patent Laid-Open No. Hei 5-304663 entitled "Image Coding Apparatus".

15 However, a property of a video image as represented by a spatial complexity or a magnitude of a movement of an input video image is usually different among different portions of the image. The difference in property of a video image appears as a difference in amount of generated codes or difficulty in  
20 coding.

Accordingly, if an allocation information amount which depends upon the bit rate is simply divided equally and is allocated to and encoded by a plurality of encoders which operate independently of each other, then this gives rise to  
25 a problem that appropriate information amounts are not allocated to the encoders and a difference in picture quality

appears among different divisions of a decoded image. In the worst case, a partial rupture in picture quality or a trouble of a buffer arises.

Further, according to the system disclosed in Japanese Patent Laid-Open No. Hei 5-304663, only when the generated information amount at a certain image division exceeds a threshold value, the quantization characteristic of adjacent image divisions is simply made rough to reduce the picture quality difference of a decoded image. Accordingly, the system described has a problem that appropriate allocation of the information amount of an entire image or efficient utilization of information by providing a comparatively greater amount of information to a portion which requires a comparatively great amount of information but reducing the amount of information at a portion which does not require a great amount of information is not realized.

#### SUMMARY OF THE INVENTION

It is an object of the present invention to provide a video image coding apparatus which realizes appropriate allocation of an information amount to individual image divisions to reduce the difference in picture quality among different divisions of a decoded image.

In order to attain the object described above, according to the present invention, there is provided a video image coding apparatus, comprising image dividing means for dividing an

input video image signal into a plurality of image divisions,  
a plurality of coding sections for individually compression  
encoding the plurality of image divisions outputted from the  
image dividing means, multiplexing means for multiplexing the  
5 plurality of compression encoded data from the coding sections  
to re-construct compression encoded data and outputting the  
compression encoded data as a compression bit stream, and  
coordinated coding control means for receiving some or all of  
coding parameters, image status parameters and coding result  
10 parameters of the coding sections and adjusting the parameters  
to be used for compression encoding by the coding sections in  
a control period or under a control condition determined in  
advance.

The coordinated coding control means may control  
15 information amounts to be allocated to the coding sections.  
Preferably, the coordinated coding control means provides an  
upper limit value and/or a lower limit value to the information  
amounts to be allocated to the coding sections.

Alternatively, the coordinated coding control means may  
20 control buffer amounts to be allocated to the coding sections.  
Preferably, the coordinated coding control means provides an  
upper limit value and/or a lower limit value to the buffer  
amounts to be allocated to the coding sections.

The video image coding apparatus may be constructed such  
25 that it further comprise means for recording the coding  
parameters and/or the image status parameters of those image



portions whose coding has been completed by the coding sections,  
and the coordinated coding control means performs coding  
control so that the coding parameters of those image portions  
which are to be coded subsequently by the coding sections may  
5 be proximate to the coding parameters of adjacent image  
portions.

In this instance, the coordinated coding control means  
may use, for the coding control, the coding parameters and the  
image status parameters of those image portions of the same  
10 frame or field image whose coding has been completed already.

Alternatively, the coordinated coding control means uses,  
for the coding control, the coding parameters and the image  
status parameters of a frame or field image in the past and  
of the same frame or field image. In this instance, the  
15 coordinated coding control means may perform the coding control  
since a time at which coding of an image of an object of  
processing at present is started using the coding parameters  
and the image status parameters of a frame or field image in  
the past.

20 In the video image coding apparatus, an input image is  
divided into image divisions by the image dividing means, and  
the image divisions are processed parallelly by the plurality  
of coding sections. Further, the coordinated coding control  
means provided for the in-division (division local) coding  
25 control sections receives some or all of coding parameters,  
image status parameters and coding result parameters from the

coding sections and adjusts those parameters to be used for coding control of the coding sections in a fixed control period or under a fixed control condition. Consequently, appropriate distribution of an information amount and appropriate buffer management can be realized, and uniformity in picture quality of a decoded image and a normal operation of a buffer can be assured.

The above and other objects, features and advantages of the present invention will become apparent from the following description and the appended claims, taken in conjunction with the accompanying drawings in which like parts or elements are denoted by like reference symbols.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram showing a video image coding apparatus to which the present invention is applied;

FIGS. 2(A) to 2(D) are schematic views illustrating different examples of a procedure of dividing an input video image;

FIGS. 3(A) and 3(B) are diagrammatic views illustrating different examples of information amount distribution and illustrating a principle of operation of the video image coding apparatus of FIG. 1;

FIG. 4 is a block diagram showing another video image coding apparatus to which the present invention is applied; and

FIG. 5 is a block diagram showing a further video image coding apparatus to which the present invention is applied.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

##### 5 First Embodiment

Referring first to FIG. 1, there is shown a video image coding apparatus to which the present invention is applied. The present video image coding apparatus includes an image dividing section 101 for dividing an input image and outputting  
10 resulting image divisions, a plurality of coding sections 103, 106 and 109 for individually coding the image divisions outputted from the image dividing section 101, a plurality of buffers 104, 107 and 110 for storing output streams of the coding sections 103, 106 and 109, respectively, a plurality  
15 of in-division coding control sections 105, 108 and 111 for controlling coding of the coding sections 103, 106 and 109, respectively, and a multiplexing section 102 for multiplexing the image division bit streams outputted from the buffers 104, 107 and 110 into a final stream and outputting the final stream.  
20 Further, a coordinated coding control section 112 is connected to the in-division coding control sections 105, 108 and 111 over a communication bus 113.

In operation, the image dividing section 101 divides a video image signal inputted thereto into a predetermined number  
25 of image divisions and supplies the image divisions to the coding sections 103, 106 and 109. In this instance, in order

to divide, for example, such a video image signal as of an image shown in FIG. 2(A), such an image dividing method as seen, for example, from any of FIGS. 2(B), 2(C) and 2(D) may used.

The coding sections 103, 106 and 109 perform compression  
5 encoding of the image divisions supplied thereto in accordance with a predetermined coding method and supplies resulting codes to the buffers 104, 107 and 110, respectively. The coding method may be, for example, the ISO/IEC13818-2 (MPEG-2VIDEO) or the like. In this instance, the coding sections 103, 106  
10 and 109 execute their coding in accordance with coding control parameters such as quantization parameters supplied thereto from the in-division coding control sections 105, 108 and 111, respectively. Further, the coding sections 103, 106 and 109 detect or calculate image status parameters such as complexity  
15 parameters of the inputted image, code status parameters used for coding such as quantization parameters, coding result parameters of an object of coding such as a generated information amount, and other necessary parameters and supplies the parameters to the in-division coding control  
20 sections 105, 108 and 111, respectively.

The buffers 104, 107 and 110 store the streams supplied thereto and supply them to the multiplexing section 102 at a predetermined appropriate timing. Thereupon, the buffers 104, 107 and 110 execute modification to use amounts of the buffers  
25 104, 107 and 110, which are upper limit amounts permitted for the buffers to use, and so forth in accordance with the coding

control parameters supplied thereto from the in-division coding control sections 105, 108 and 111, respectively. Further, the buffers 104, 107 and 110 supply buffer occupation amounts thereof at present and so forth as coding status parameters to the in-division coding control sections 105, 108 and 111, respectively.

The in-division coding control sections 105, 108 and 111 perform coding control based on the image status parameters, coding status parameters, coding result parameters and so forth supplied thereto to produce appropriate coding control parameters and supply the coding control parameters to the coding sections 103, 106 and 109 and the buffers 104, 107 and 110, respectively. Further, the in-division coding control sections 105, 108 and 111 communicate the parameters and so forth supplied thereto from the coding sections 103, 106 and 109 and the buffers 104, 107 and 110 with the coordinated coding control section 112 over the communication bus 113. For the coding control method, a method of adjusting a quantization parameter based on a buffer occupation amount using feedback control is employed usually. It is to be noted that, in the coding control, the in-division coding control sections 105, 108 and 111 may operate basically independently of each other for a time until updating of the coding control parameters is performed from the coordinated coding control section 112, and may operate equivalently to a coding control circuit of an ordinary architecture.

The coordinated coding control section 112 has a function of determining basic coding control parameters based on parameters such as a bit rate and an image size, which are supplied from a user, an apparatus controller or the like and  
5 determine entire coding operation, and supplying the determined basic coding control parameters to the image dividing section 101, the in-division coding control sections 105, 108 and 111 and the multiplexing section 102. The coordinated coding control section 112 has another function  
10 of evaluating coding situations of the individual image divisions with various parameters supplied thereto over the communication bus 113, calculating coding control parameters such as appropriate information amounts and buffer amount allocations and supplying the calculated coding control  
15 parameters over the communication bus 113. The method of calculating the coding control parameters may proportionally distribute the information amount and the buffer amount, for example, in accordance with degrees of complexity of individual image divisions such that a comparatively great amount of  
20 information may be allocated to a comparatively complex image division. Further, the coding control parameters may be updated in a predetermined period. The period, however, may alternatively be varied adaptively. Further, it is possible for the coordinated coding control section 112 to have an  
25 additional function of supervising the states of all of the buffers supplied thereto from the multiplexing section 102,

performing such processing as urgent stopping of coding and reflecting this on the coding control parameters.

5 The communication bus 113 interconnects the coordinated coding control section 112 and the in-division coding control sections 105, 108 and 111 and is used to communicate various parameters necessary for coding control thereover. While the communication bus 113 here is formed, for example, as a shared bus connection, it may alternatively have some other communication configuration such as a serial connection or a  
10 star connection.

The multiplexing section 102 couples the image division streams supplied thereto from the buffers 104, 107 and 110 to reconstruct a stream of an entire image and outputs the stream of the entire image. If a necessary bit rate is not met in  
15 a fixed bit rate operation, then stuffing may be performed by the multiplexing section 102. The multiplexing section 102 further has a function of supplying the occupation amount of a buffer for storing the stream after the coupling, a situation of the stuffing and so forth to the coordinated coding control  
20 section 112. The object of the present invention described hereinabove can be achieved by the architecture and operation of the video image coding apparatus described above.

#### Second Embodiment

FIG. 4 shows another video image coding apparatus to  
25 which the present invention is applied. The video image coding apparatus of the present embodiment includes an image dividing

section 401, a plurality of coding sections 403, 406 and 409,  
a plurality of buffers 404, 407 and 410, a plurality of  
in-division coding control sections 405, 408 and 411, a  
multiplexing section 402 and a communication bus 413 which are  
5 similar to the image dividing section 101, coding sections 103,  
106 and 109, buffers 104, 107 and 110, in-division coding  
control sections 105, 108 and 111, multiplexing section 102  
and communication bus 113 of the video image coding apparatus  
of the first embodiment described hereinabove with reference  
10 to FIG. 1, respectively. The video image coding apparatus of  
the present embodiment further includes a general control  
section 412 in place of the coordinated coding control section  
112.

The video image coding apparatus of the second embodiment  
15 shown in FIG. 4 is similar in basic architecture to but is  
different from the video image coding apparatus of the first  
embodiment described hereinabove with reference to FIG. 1 in  
that the coordinated coding control function, which the  
coordinated coding control section 112 in the video image  
20 coding apparatus of the first embodiment of FIG. 1 has, is  
incorporated in the in-division coding control sections 405,  
408 and 411. In particular, in the video image coding apparatus  
of the first embodiment, parameters to be used for coding are  
collectively inputted to the coordinated coding control  
25 section (112 in FIG. 1), by which calculation for coordinated  
coding control is performed based on the parameters, and



results of the calculation are transferred back to the image division coding control sections. In the video image coding apparatus of the present embodiment, however, various parameter information from the general control section 412 and  
5 the in-division coding control sections 405, 408 and 411 is outputted to the communication bus 413, and the in-division coding control sections 405, 408 and 411 may individually read parameters respectively required thereby and perform calculation for coordinated coding control.

10 Accordingly, in the video image coding apparatus of the present embodiment, the general control section 412 is equivalent to the coordinated coding control section 112 of FIG. 1 which does not have the coordinated coding control function. Consequently, the general control section 412  
15 principally has a function of setting basic coding control parameters based on parameters such as a bit rate, an image size and so forth, which are supplied thereto from a user, an apparatus controller or the like and determine an entire coding operation, and supplying the set basic coding control  
20 parameters to the image dividing section 401, in-division coding control sections 405, 408 and 411 and multiplexing section 402.

Since the present video image coding apparatus has such an architecture as described above, the object of the present  
25 invention is achieved, and besides, parameter information used for coding need not be communicated between the general control

section 412 and the in-division coding control sections 405, 408 and 511. Consequently, also an advantage that an overhead in communication can be reduced is achieved.

### Third Embodiment

5           FIG. 5 shows a further video image coding apparatus to which the present invention is applied. The video image coding apparatus of the present embodiment includes an image dividing section 501, a plurality of coding sections 503, 506 and 509, a plurality of buffers 504, 507 and 510, a plurality of  
10 in-division coding control sections 505, 508 and 511, a multiplexing section 502, a coordinated coding control section 512 and a communication bus 513 which are similar to the image dividing section 101, coding sections 103, 106 and 109, buffers 104, 107 and 110, in-division coding control sections 105, 108  
15 and 111, multiplexing section 102, coordinated coding control section 112 and communication bus 113 of the video image coding apparatus of the first embodiment described hereinabove with reference to FIG. 1, respectively. The video image coding apparatus of the present embodiment additionally includes a  
20 memory 514 for storing various parameters.

More particularly, the memory 514 stores various parameter information of a frame or frames or a field or fields in the past and various parameter information of a frame or a field being encoded at present. The parameter information  
25 stored in the memory 514 is referred to upon calculation for coordinated control or is transferred, if necessary, to the

in-division coding control sections 505, 508 and 511 so that such control as to make resulting parameters of coding such as quantization parameters at or around boundary portions of image divisions uniform can be performed. Consequently, an  
5 effect of uniformity of the picture quality at or around boundary portions of a decoded image is obtained.

Meanwhile, with regard to the video image coding apparatus of the second embodiment described hereinabove with reference to FIG. 4, a similar effect of uniformity of the  
10 picture quality of a decoded image at or around boundary portions of image divisions can be obtained if a memory function is additionally provided to the in-division coding control sections 405, 408 and 411.

In the following, means to solve the subject of the  
15 present invention is specifically described with reference to FIG. 1. The present video image coding apparatus shown in FIG. 1 is of the type wherein an input image is divided into image divisions and the image divisions are processed parallelly by the plurality of coding sections 103, 106 and 109 and is  
20 characterized in that it comprises, for the in-division coding control sections 105, 108 and 111, the coordinated coding control section 112 for receiving some or all of coding parameters from the coding sections 103, 106 and 109, image status parameters and coding result parameters and adjusting  
25 those parameters to be used for coding control of the coding sections 103, 106 and 109 in a fixed control period or under

fixed control conditions.

The coordinated coding control section 112 receives some or all of coding parameters from the coding sections 103, 106 and 109, image status parameters and coding result parameters over the communication bus 113. The coding parameters may include, as an example, a quantization matrix or quantization parameters. The image status parameters may be complexity degrees or movement amounts of an image. Further, the coding result parameters may be a generated information amount or a buffer occupation amount. The coordinated coding control section 112 operates based on the parameters to detect properties or coding situations of image divisions, determine appropriate information amount allocations and appropriately adjust parameters to be used for coding control by the in-division coding control sections 105, 108 and 111. The parameters may be, for example, information amount allocations or buffer amount allocations.

An example of the adjustment operation of parameters by the coordinated coding control section 112 is described below with reference to FIGS. 2(A) to 2(D) and 3. If an image signal of such an image as illustrated in FIG. 2(A) is inputted, then such dividing methods as illustrated, for example, in FIGS. 2(B), 2(C) and 2(D) are available as a method of dividing the image and parallelly encoding image divisions obtained by the division. In each of the methods illustrated, the image is divided into four divisions. In each of the methods, imaging

objects included in the image divisions are different from one another, and when the image divisions are parallelly coded by the coding sections, also generation patterns of the information amount are quite different from one another.

5        If such a method as illustrated in FIG. 3(A) wherein the bit rate of a transmission line or a recording medium is allocated uniformly and divisionally to such image divisions as described above is employed, then the picture quality of a decoded image is much different among the different image  
10       divisions. Therefore, if the bit rate is distributed based on the properties of the image divisions in such a manner as seen from FIG. 3(B), then the difference of the picture quality of the decoded image among the different image divisions can be reduced. While an example of allocation of the information  
15       amount based on the bit rate is described above, also it is possible to distribute the buffer amount similarly. Where such methods are employed, coding control of the coding sections 103, 106 and 109 can be carried out more appropriately.

         However, if an extremely high value or an extremely low  
20       value is allocated in such distribution of the information amount or the buffer amount, then the coding control may not possibly operate regularly, but control rupture or control oscillation may occur. Therefore, in the present invention, the problem just described is solved by providing an upper limit  
25       value and a lower limit value to the distribution of the information amount and the distribution of the buffer amount.

Further, where adjusted parameters are supplied from the coordinated coding control section 112, it may possibly occur that, although the coding situations in image divisions are preferable on the average, the picture quality exhibits discontinuity at the boundary between image divisions. This problem is described below. For in-division coding control, feedback control from a buffer is used popularly. Therefore, the coding result parameter is frequently different among different positions even in an image division. Accordingly, where an imaging object extends over a plurality of image divisions as seen in FIG. 2(B), 2(C) or 2(D), even if an image object is continuous, the coding result parameter is sometimes different between the image divisions over which the image object extends, and this makes the picture quality of a decoded image discontinuous. Therefore, in the present invention, this problem is solved by recording coding result parameters and so forth of image divisions encoded already and so forth and causing the in-division coding control to operate so that the coding situations of boundary portions may be uniform.

In this manner, the embodiments described above are directed to a video image coding apparatus for dividing an input video image and parallelly processing resulting image divisions by means of a plurality of coding sections, by which appropriate allocation of an information amount among different image divisions is realized, the difference in picture quality among different image divisions of a decoded

image is minimized and a normal buffer condition is realized. In order to achieve this object, the encoding sections perform coding control basically independently of each other, and while a high degree of facility in apparatus implementation is kept, appropriate coding control in accordance with a property of an image or a coding situation is allowed. As a result, augmentation of the picture quality of a decoded image, augmentation of the coding efficiency and assurance of a normal operation of a buffer are realized.

- 10           While preferred embodiments of the present invention have been described using specific terms, such description is for illustrative purposes only, and it is to be understood that changes and variations may be made without departing from the spirit or scope of the following claims.

What Is Claimed Is:

1. A video image coding apparatus, comprising:

image dividing means for dividing an input video image signal into a plurality of image divisions;

5       a plurality of coding sections for individually compression encoding the plurality of image divisions outputted from said image dividing means;

          multiplexing means for multiplexing the plurality of compression encoded data from said coding sections to re-  
10       construct compression encoded data and outputting the compression encoded data as a compression stream; and

          coordinated coding control means for receiving some or all of coding parameters, image status parameters and coding result parameters of said coding sections and adjusting the  
15       parameters to be used for compression encoding by said coding sections in a control period or under a control condition determined in advance.

2. A video image coding apparatus as claimed in claim 1, wherein said coordinated coding control means controls  
20       information amounts to be allocated to said coding sections.

3. A video image coding apparatus as claimed in claim 2, wherein said coordinated coding control means provides an upper limit value and/or a lower limit value to the information amounts to be allocated to said coding sections.

25       4. A video image coding apparatus as claimed in claim 1, wherein said coordinated coding control means controls



buffer amounts to be allocated to said coding sections.

5           5. A video image coding apparatus as claimed in claim 4, wherein said coordinated coding control means provides an upper limit value and/or a lower limit value to the buffer amounts to be allocated to said coding sections.

10           6. A video image coding apparatus as claimed in claim 1, further comprising means for recording the coding parameters and/or the image status parameters of those image portions whose coding has been completed by said coding sections, and wherein said coordinated coding control means performs coding control so that the coding parameters of those image portions which are to be coded subsequently by said coding sections may be proximate to the coding parameters of adjacent image portions.

15           7. A video image coding apparatus as claimed in claim 6, wherein said coordinated coding control means uses, for the coding control, the coding parameters and/or the image status parameters of those image portions of the same frame or field image whose coding has been completed already.

20           8. A video image coding apparatus as claimed in claim 6, wherein said coordinated coding control means uses, for the coding control, the coding parameters and/or the image status parameters of a frame or field image in the past and of the same frame or field image.

25           9. A video image coding apparatus as claimed in claim 8, wherein said coordinated coding control means performs the

coding control since a time at which coding of an image of an object of processing at present is started using the coding parameters and/or the image status parameters of a frame or field image in the past.

ABSTRACT OF THE DISCLOSURE

A video image coding apparatus which realizes appropriate allocation of an information amount to individual image divisions to reduce the difference in picture quality among different divisions of a decoded image. An input video image signal is into a plurality of image divisions by an image dividing section, and the image divisions are compressed coded by a plurality of coding sections. Resulting compression encoded data are multiplexed by a multiplexing section reconstruct compression encoded data, and the compression encoded data are outputted as a compression stream. A coordinated coding control section receives some or all of coding parameters, image status parameters and coding result parameters of the coding sections and adjusts the parameters to be used for compression encoding by the coding sections in a control period or under a control condition determined in advance.

FIG.1

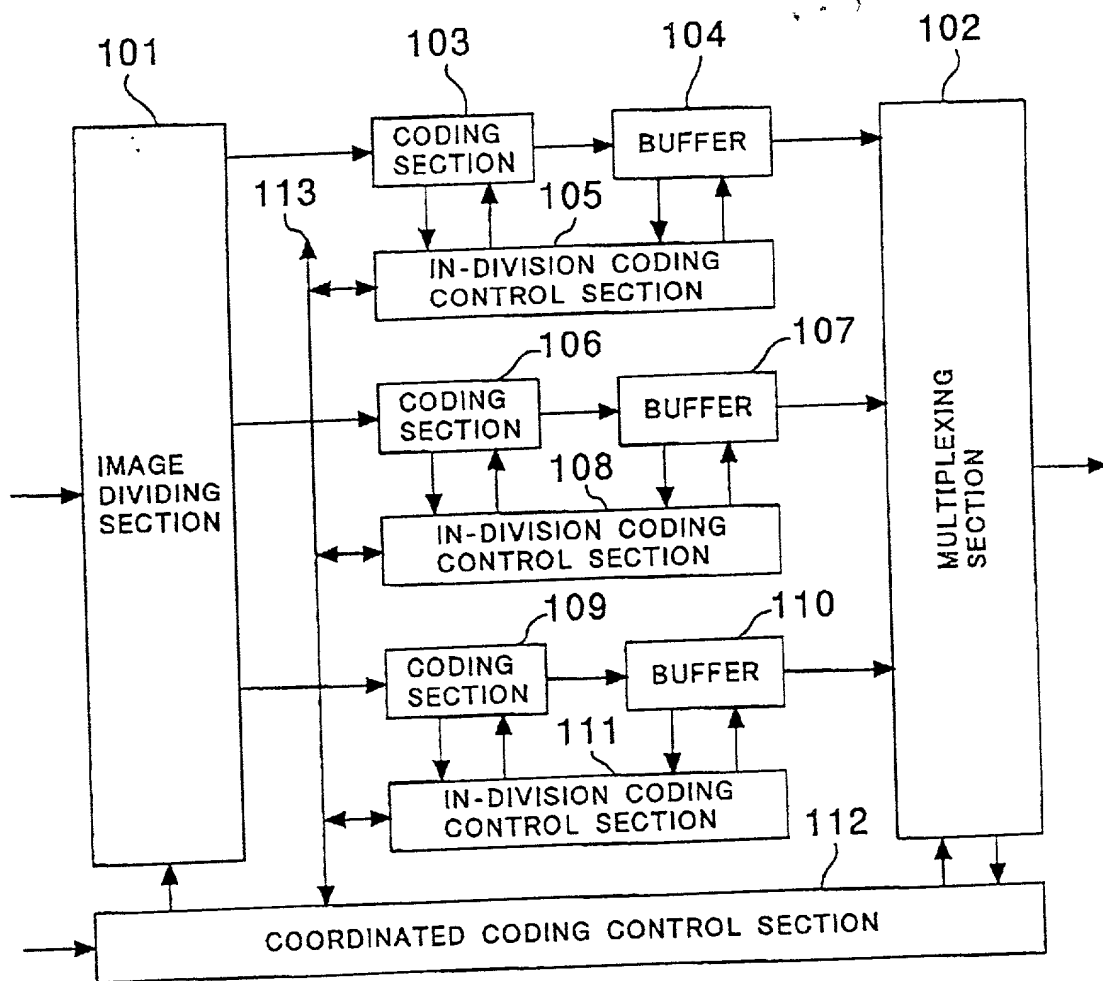


FIG.2(A)

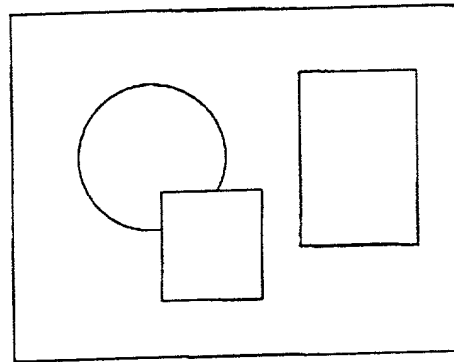


FIG.2(B)

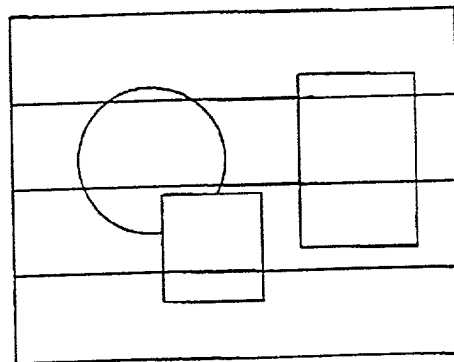


FIG.2(C)



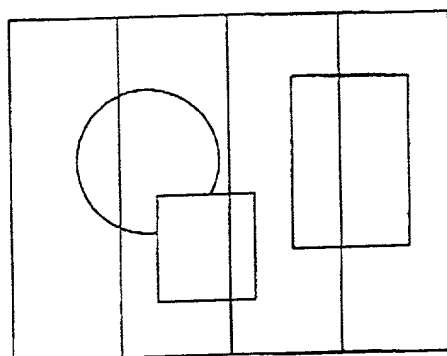


FIG.2(D)

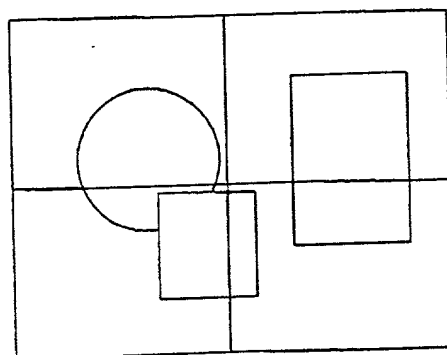

# FIG.3(A)

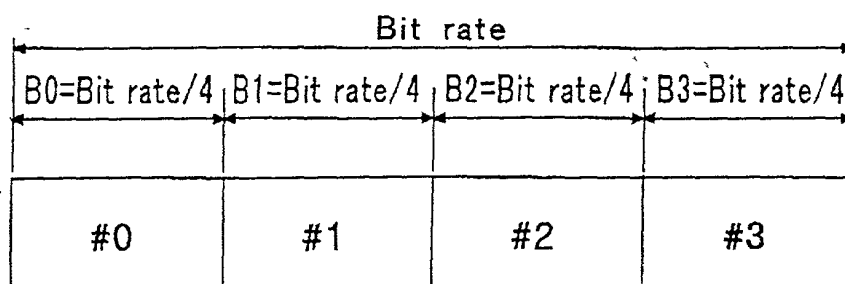

# FIG.3(B)

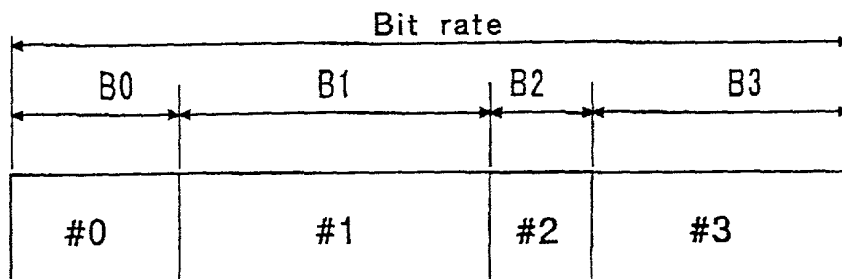


FIG.4


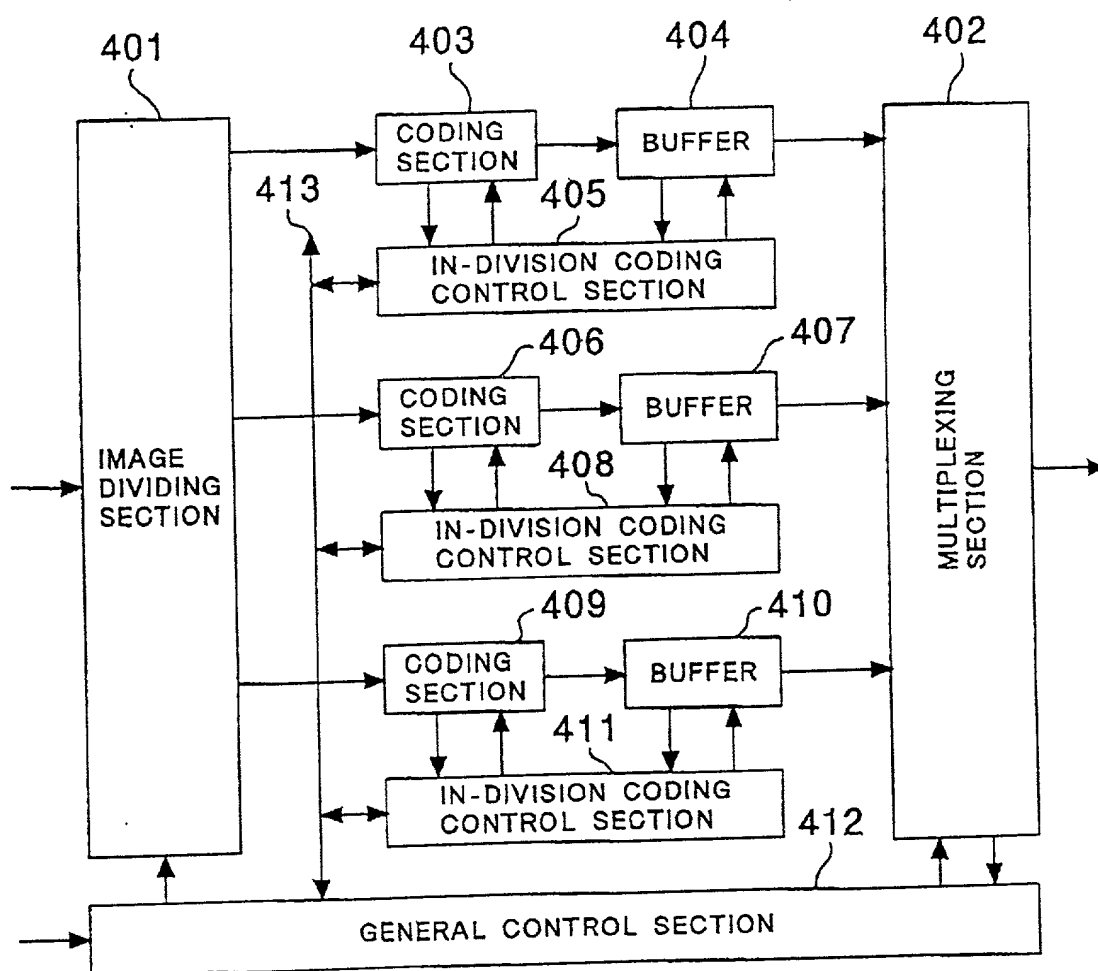




FIG.5

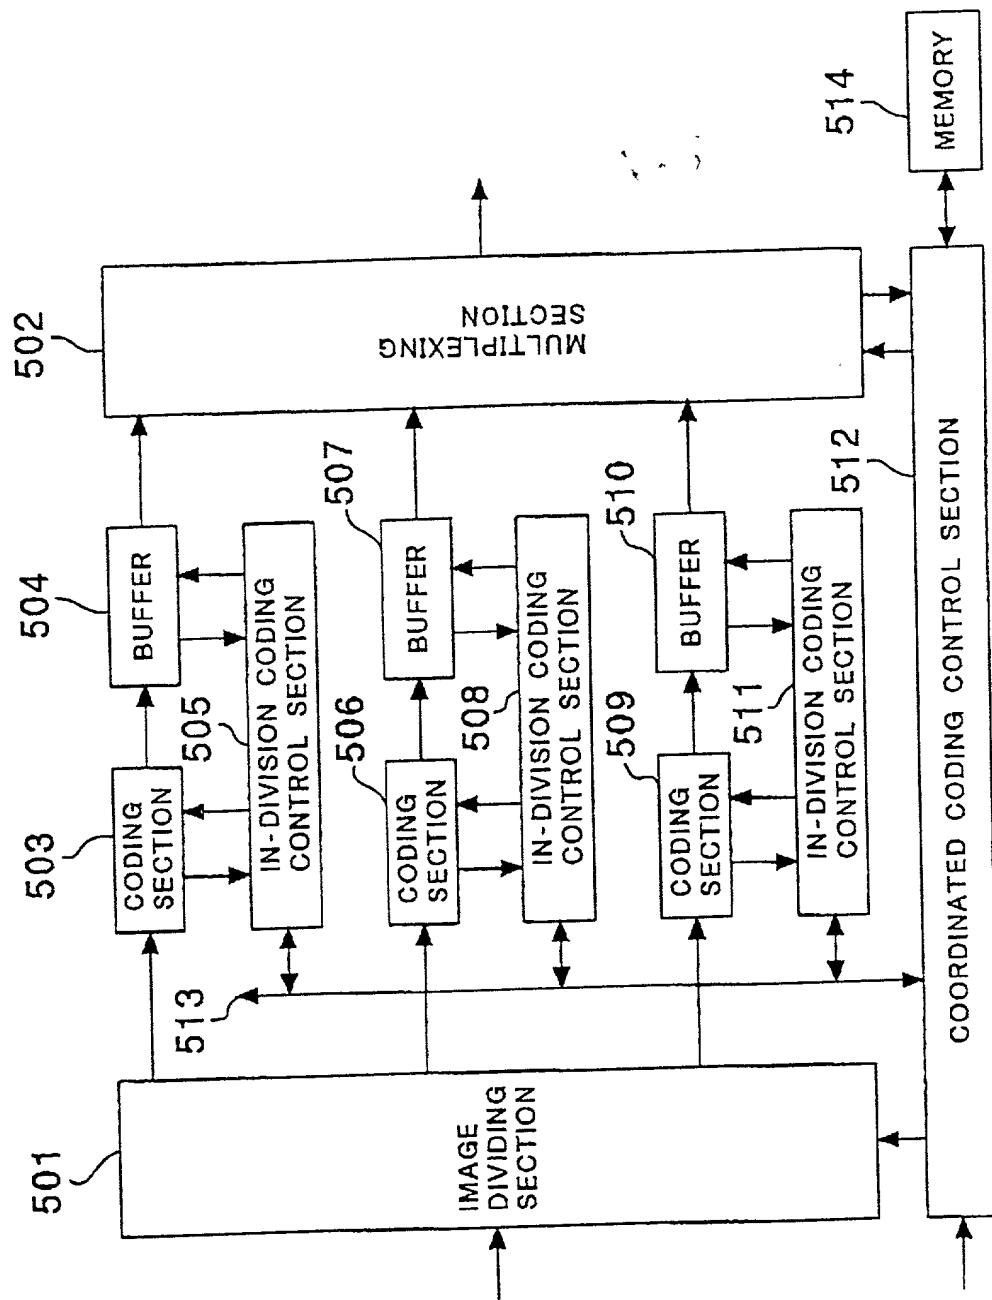

Docket No.

# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

VIDEO IMAGE CODING APPARATUS

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application Number \_\_\_\_\_

and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)		Priority Not Claimed
<u>11-052398</u>	<u>Japan</u>	<u>1/3/1999</u>
(Number)	(Country)	(Day/Month/Year Filed)
_____	_____	_____
(Number)	(Country)	(Day/Month/Year Filed)
_____	_____	_____
(Number)	(Country)	(Day/Month/Year Filed)

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

_____	_____
(Application Serial No.)	(Filing Date)
_____	_____
(Application Serial No.)	(Filing Date)
_____	_____
(Application Serial No.)	(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Stephen D. Murphy, Reg. No.: 22,002

Paul J. Esatto, Reg. No.: 30,749

William C. Roch, Reg. No.: 24,972

Mark J. Cohen, Reg. No.: 32,211

Frank S. DiGiglio, Reg. No.: 31,346

Donald T. Black, Reg. No.: 27,999

Send Correspondence to: Paul J. Esatto, Jr.  
Scully, Scott, Murphy & Presser  
400 Garden City Plaza  
Garden City, New York 11530

Direct Telephone Calls to: *(name and telephone number)*  
Paul J. Esatto, Jr. (516) 742-4343

Full name of sole or first inventor	
Satoshi NOGAKI	
Sole or first inventor's signature	Date
Satoshi Nogaki (野村)	February 28, 2000
Residence	
Tokyo, Japan	
Citizenship	
Japanese	
Post Office Address	
c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	